


Ashwood Distressed Click Bamboo Flooring

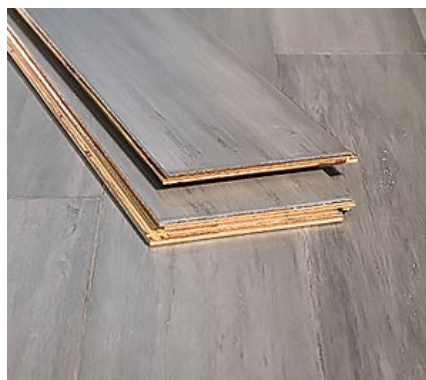

Specifications

Item No	045921090488
Flooring group	Click Lock Engineered
Price	5.16/sq ft
Species	Moso Bamboo aged 5-7 Years
Sq ft/box	22.62
Finish	Accuseal Ultra with aluminum oxide
Surface	handscraped
Janka rating	5342
Grain	Strand Woven
Sustainability	Lacey Act Compliant. FSC®-Certified Available By Request.
Nailing info	do not nail
Length	6 ft (1850 mm)
Width	5-5/8 in (142 mm)
Thickness	9/16 in (14 mm)
Wear layer	4 mm Strand Bamboo
Profile	Click Lock
Profile/edges	micro bevel
Planks Description	Single length planks: all planks are same dimensions

Warranty	Lifetime Structural and Finish (residential)
R value	0.54
Moisture content	ASTM D4442, Oven Dry Method: 6%-10% average
SurfSlip resistance	Coefficient of Friction: ASTM D2394 Average; Static 0.586; Sliding 0.59
Flammability	ASTM E648: Class 1 Interior
Smoke density	ASTM E622: Max 344 flaming, 192 non-flaming
Dimensional	ASTM D1037 50/90% RH,
Stability	Linear .03, Thickness 1.52, Width .20
Coating adhesion	Classification: 5B
Acclimation period	72 hrs (7 days recommended for extra humid/dry climates)
Weight/box	50
Planks/box	8
Radiant Heat Safe	Yes
High traffic	Yes
Pet friendly	Yes
Install below grade	No
Floating installation	Yes
Installation	Float or Glue Down

