


Carbonized Click 3ft Lengths Bamboo Flooring



Specifications

| | | | |
|---------------------------|---|------------------------------|---|
| Item No | 733074274328 | Warranty | Lifetime Structural and Finish (residential) |
| Flooring group | Click Lock Engineered | R value | 0.54 |
| Price | 3.64/sq ft | Moisture content | ASTM D4442, Oven Dry Method: 6%-10% average |
| Species | Moso Bamboo aged 5-7 Years | SurfSlip resistance | Coefficient of Friction: ASTM D2394 Average; Static 0.586; Sliding 0.59 |
| Sq ft/box | 14.85 | Flammability | ASTM E648: Class 1 Interior |
| Finish | Accuseal Ultra with aluminum oxide | Smoke density | ASTM E622: Max 344 flaming, 192 non-flaming |
| Surface | flat_smooth | Dimensional | ASTM D1037 50/90% RH, |
| Janka rating | 5342 | Stability | Linear .03, Thickness 1.52, Width .20 |
| Grain | Strand Woven | Coating adhesion | Classification: 5B |
| Sustainability | Lacey Act Compliant. FSC®-Certified Available By Request. | Acclimation period | 72 hrs (7 days recommended for extra humid/dry climates) |
| Nailing info | do not nail | Weight/box | 29 |
| Length | 3 ft (920 mm) | Planks/box | 12 |
| Width | 4-15/16 in (125 mm) | Radiant Heat Safe | No |
| Thickness | 3/8 in (10 mm) | High traffic | Yes |
| Wear layer | 2.5 mm Strand Bamboo | Pet friendly | Yes |
| Profile | Click Lock | Install below grade | Yes |
| Profile/edges | micro bevel | Floating installation | Yes |
| Planks Description | Single length planks: all planks are same dimensions | Installation | Float or Glue Down |

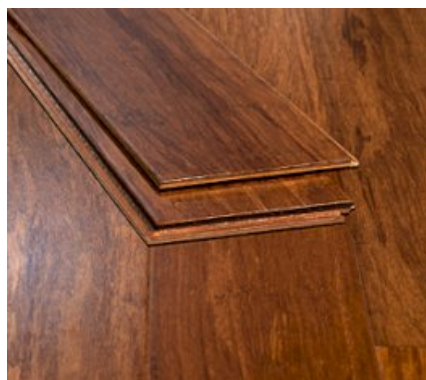