


Carbonized Antiqued Rigid Core Bamboo Flooring

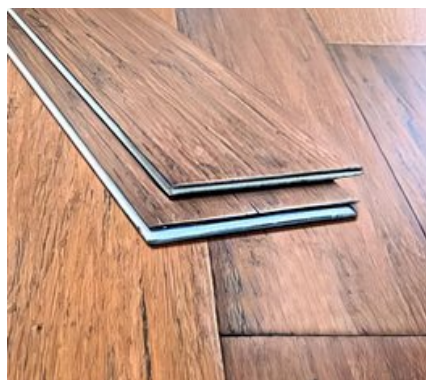

Specifications

Item No	808857874252
Flooring group	Click Lock BSPC
Price	4.31/sq ft
Species	Strand Woven Bamboo with SPC Core
Sq ft/box	15.45
Finish	Accuseal Ultra with aluminum oxide
Surface	antiqued
Janka rating	5342
Grain	Bamboo_SPC
Sustainability	Lacey Act Compliant.
Nailing info	do not nail
Length	3 ft (920 mm)
Width	5-1/8 in (130 mm)
Thickness	9/32 in (7mm - includes 1mm acoustic pad)
Wear layer	1 mm Strand Bamboo
Profile	Click Lock
Profile/edges	micro bevel
Planks Description	Single length planks: all planks are same dimensions

Warranty	Lifetime Structural and Finish (residential)
R value	
Moisture content	ASTM D4442, Oven Dry Method: 6%-10% average
SurfSlip resistance	Coefficient of Friction: ASTM D2394 Average; Static 0.586; Sliding 0.59
Flammability	ASTM E648: Class 1 Interior
Smoke density	ASTM E622: Max 344 flaming, 192 non-flaming
Dimensional	ASTM D1037 50/90% RH,
Stability	Linear .03, Thickness 1.52, Width .20
Coating adhesion	Classification: 5B
Acclimation period	24 hours
Weight/box	37
Planks/box	12
Radiant Heat Safe	Yes
High traffic	Yes
Pet friendly	Yes
Install below grade	No
Floating installation	Yes
Installation	Floating

